
CONCRETE FILLED MANHOLE COVER


(PARKWAY USE ONLY)



CONCRETE.
SURFACE TO BE BROOM
FINISHED OR MATCHED
TO THE SURROUNDING
PAVEMENT.

- I. COVER DESIGNED FOR ALHAMBRA FOUNDRY FRAME NO. A-1105 OR EQUAL.
- 2. CONCRETE MAY BE POURED ON JOB-SITE*

 OR COVER MAY BE PURCHASED PRE-POURED.
- 28 DAY CONCRETE COMPRESSIVE STRENGTH TO EQUAL 3000 PSI.
- 4. TOTAL WEIGHT = 185 LBS.
- 5. SUPPLIER OF PRECAST TYPE: BROOKS PRODUCTS, INC. EL MONTE, CALIF.
 - * IF POURED ON JOB-SITE, THE COVER MUST BE IN PLACE AT TIME OF POURING AND INDEX MARKS (NOTCHES) CUT IN THE COVER EDGE AND OUTSIDE FRAME.

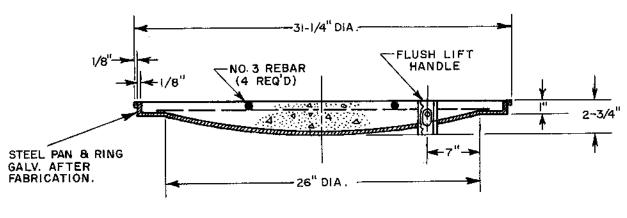

SECTION "AA"